

MEKOL

1570

High-quality dispersion adhesive for coverings

It can be used for gluing:

- PVC coverings in sheets or tiles,
- LVT - Luxury vinyl tiles,
- textile carpets,
- natural or plastic cork

on levelled cement floors or other porous surfaces. It is suitable for **floor heating systems** as well as for laying the coverings to the walls.

Properties:

- **easy to spread** by using notched trowel
- **high initial grip** for quick adhesion to all coverings
- **long open time** enables laying the coverings up to 45 minutes after spreading the adhesive,
- **high final strength and bond elasticity** for durable and frequently used floors

Spread quantity:

- **250 – 300 g/m²** using notched trowel A1
- **350 – 400 g/m²** using notched trowel A2

Application:


The adhesive should be mixed well before use. It should be applied with notched trowel or roller equally on the smoothed, dried and clean surface. The surface spread quantity should be within laying coverings possibilities in open time of the adhesive. Covering should be laid after adhesive drying time and roll on frequently. Final bond strength is achieved in some days.

Packing:

- 12 kg plastic vessel (for approx. 40 m²)
- 6 kg plastic vessel (for approx. 20 m²)



+ GRATIS:
For each 12 kg vessel you will get a notched blad gratis

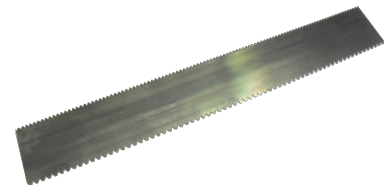

Besides the above qualities **MEKOL 1570** is distinguished also by **competitive price**. For more detailed information, please, refer to e-mail: prodaja@mitol.si or call **+386 5 73 12 326**.



MITOL, tovarna lepil, d.o.o., Sežana, Partizanska c. 78, 6210, Slovenija
T: +386 5 73 12 300, F: +386 5 73 12 390, E: mitol@mitol.si, I: www.mitol.si

CHOOSE THE RIGHT ADHESIVE

	PARKETOLIT 1513	PARKETOLIT 1514	PARKETOLIT 1549	PARKETOLIT 1550	PARKETOLIT 1551	PARKETOLIT 1554	PARKETOLIT 1555	PARKETOLIT E60	PARKETOLIT E61	PARKETOLIT E65	PARKETOLIT E66	PARKETOLIT D3	MEKOL 1560	MEKOL 1570	MEKOL 1580	MITOPUR 1530
SOLID PARQUET ELEMENTS																
• on concrete or on leveller	■	■	●	●	●	●	●	●	●	●	●					
• on wooden floors		■	●	●	●	●	●	●	●	●	●					
• on nonporous surfaces			●	●	●	●	●	●	●	●	●					
• on heated floors			●	●	●	■	■	●	●	●	●					
• on concrete with increasing moisture			■	■	■	■	■	●	●	■	■					
• unstable wood (beech, ash...)			■	■	■	■	●	●	●	●	●					
MOSAIC PARQUET																
• on concrete or on leveller	●	●	●	●	●	●	●	●	●	●	●					
• on wooden floors		●	●	●	●	●	●	●	●	●	●					
• on nonporous surfaces			●	●	●	●	●	●	●	●	●					
• on heated floors	●	■	●	●	●	■	■	●	●	●	●					
• on concrete with increasing moisture			■	■	■	■	■	●	●	■	■					
• unstable wood (beech, ash...)			●	●	●	●	●	●	●	●	●					
SOLID LAMPARQUET			●	●	●	●	●	●	●	■	■					
SOLID BOARDS			●	●	●	●	●	■	■	■	■					
MULTY-LAYER PARQUET			■	■	■	●	●	●	●	●	●	●				
SOLID VERTICAL FINGER PARQUET			●	●	●	●	●	●	●	●	●					
LAMINATED FLOORS								■	■	■	■	●				
PVC													●	●	●	■
TEXTILE COVERINGS													●	●		
CORK (natural, plastic)														●		
RUBBER			■	■	■			■	■	■	■				●	●
LINOLEUM															●	
CERAMIC TILES			■	■	■	■	■	■	■	■	■					■
ARTIFICIAL GRASS			■	■	■	■	■									●
WOODEN STEPS			■	■	■	■	■	■	■	■	■					■

● basic use

■ possible use

